



Science.
Applied to Life.™

3M™ Trizact™ Finesse-it™ Paint Defect Repair System

Defect-free finishes made easy.

Featuring
new abrasives,
pads and polish
options!

The fast, two-step
way to reduce minor
paint defects

Now you're ju from a defect-



The science of smooth

The 3M™ Trizact™ Finesse-it™ Paint Defect Repair System is proven to deliver high-quality repairs of minor clearcoat defects, such as dust and minor scratches. Already the industry leader, this trusted system is now made even better with next generation polishes, foam pads and abrasives.

See what's new!

- **Abrasives:** 468LA, 366LA
- **Pads:** Gray, Red, Green
- **Polishes:** K215, K211

Altogether, this improved system allows you to remove defects easily while saving time – increasing your productivity.


▶ Step 1: Sand

- Level/remove the defect
- Sand the defect for 1 to 3 seconds, depending on the size of the defect
- Wipe the area clean with a Scotch-Brite™ High Performance Cloth

Basic starting sequences


Type of finish	Sand
1K Clearcoat	466LA, Grade A5
2K Clearcoat	464LA, Grade A5
	468LA, Grade A5

1997 - 466LA



This tri-cut pattern is designed for consistent cut and finish. Introduced in 1992, it was the first micro-replicated product offered by 3M.

2011 - 464LA

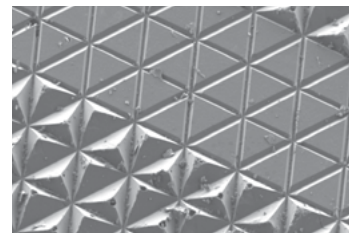

The first open channel Trizact abrasive was introduced in 2011. This design allows sanding residue to be easily swept away.

Just 2 steps away from a free finish!



▶ Step 2: Polish

- Apply a small drop of polish on the sanded area
- Spread the polish evenly over the spot using the buffing pad, without running the buffer, then polish for 8 to 12 seconds
- Wipe the area clean with a Scotch-Brite™ High Performance Cloth

The right tools for the job

This 3M system offers multiple options to meet your individual needs. Are you experiencing difficulties with:


- Your abrasive not cutting fast enough?
- Removing the abrasive sand scratch?
- Seeing haze?
- Your polishing time taking too long?

We're happy to help! Reach out to your 3M Sales Representative or 3M Technical Service Representative for assistance.

Polish


Finesse-it Purple	Gray Pad
	Orange Pad
K211	Orange Pad
K215	Gray Pad

2016 - 366LA



An aluminum oxide alternative was launched in 2016.

2016 - 468LA



This newest pattern was designed to provide faster breakdown and start time while requiring less unit pressure. Its unique design allows for greater disc life and productivity.

The secret of the fast, fine and predictable finish of the Finesse-it system lies in the unique construction of the 3M™ Trizact™ Finesse-it™ Film Discs.

Using patented 3M microreplication technology, micron-graded mineral particles are formed into tiny pyramids or structures of abrasive mineral, that is coated on a non-compressible polyester backing. As these structures containing abrasive minerals wear, fresh, sharp mineral is continually exposed to give you a **consistent cut and a predictable, fine finish.**

▶ Step 1: Sanding

	Product Name	Description	Size	UPC Number	Picture	
Abrasives	NEW 3M™ Trizact™ Finesse-it™ Film Discs 468LA	Grade A3	1-1/4" diameter	051125-87189-4		
			1-3/8" scalloped	051125-87189-1		
		Grade A5	1-1/4" diameter	051125-87190-7		
			1-3/8" scalloped	051125-87191-4		
		Grade A7	1-1/4" diameter	051125-87192-1		
			1-1/4" scalloped	051125-87193-8		
	NEW 3M™ Trizact™ Finesse-it™ Film Discs 366LA	Grade A3	Grade A3	1-1/4" diameter	051125-86749-1	
				1-3/8" scalloped	051125-86753-5	
		Grade A5	Grade A5	1-1/4" diameter	051125-86749-8	
				1-3/8" scalloped	051125-86752-8	
		Grade A7	Grade A7	1-1/4" diameter	051125-86750-4	
				1-3/8" scalloped	051125-86751-1	
3M™ Trizact™ Finesse-it™ Film Discs 464LA	Grade A3 Best finish	Grade A3 Best finish	1-1/4" diameter	00051141276106		
			1-3/8" scalloped			
	Grade A5 Fine finish	Grade A5 Fine finish	1-1/4" diameter	00051141276113		
			1-3/8" scalloped			
	Grade A7 Fastest cut	Grade A7 Fastest cut	1-1/4" diameter	00051141276120		
			1-3/8" scalloped			
3M™ Trizact™ Finesse-it™ Film Discs 466LA	Grade A3 Best finish	Grade A3 Best finish	1-1/4" diameter	051141-20515-1		
			1-3/8" scalloped	051141-20514-4		
	Grade A5 Fine finish	Grade A5 Fine finish	1-1/4" diameter	051111-56251-2		
			1-3/8" scalloped	051111-61637-6		
	Grade A7 Fastest cut	Grade A7 Fastest cut	1-1/4" diameter	051111-56288-8		
			1-3/8" scalloped	051111-56285-7		
Machine Sanding Accessories	3M™ Elite Series Mini Orbital Sander	Sanding tools for 3M™ Trizact™ Discs	1-1/4" diameter	051141-28737-9		
	3M™ Mini Random Orbital Nib Sander			051141-20244-0		
	3M™ Finesse-it™ Roloc™ Sanding Pad 02345	Sanding Pad	1-1/4" diameter	051111-50198-6		
Hand Sanding Accessories	3M™ Finesse-it™ Hand Sanding Pad	Standard	1-1/4" diameter	051111-50199-3		
		Contoured		051135-92499-0		

Sanding Product Selection Guidelines

Finer → Fine

Less Aggressive → More Aggressive

A3 → **A5** → **A7**

Trizact film discs are available in three grades, for use on a variety of topcoats and to accommodate most finish and process requirements.

Polishing Product Selection Guidelines

Fine → Finer

Fast → Faster

Finish: **FM** **P** **EF** **K215GP** **FF** **UF**

Cut: **UF** **FF** **EF** **K211** **P** **K215GP** **FM**

FM = Finishing Material
P = Purple **K215 K211** **EF** = Extra Fine
FF = Final Finish **UF** = Ultra Fine

* Loop material on one side, vinyl on other. Use with PSA discs on 3M Sander 3125.

■ For Polishing OEM Clear Coats
 ■ Other Finesse-it Polishes*

▶ Step 2: Polishing

	Product Name	Description	Size	UPC Number	Picture
Pads	NEW 3M™ Finesse-it™ Buffing Pads*	Gray Foam	3-1/4"	051141-28878-9	
		Gray Foam	3-3/4"	051141-28879-6	
		Gray Foam	5-1/4"	051141-28880-2	
		Gray Foam, Flat Face	3-1/2"	051141-28873-4	
		Orange Foam / White Loop	3-1/4"	051111-51151-0	
		Orange Foam / Black Loop	3-1/4"	051111-60527-1	
		Orange Foam / White Loop	3-3/4"	051111-51158-9	
		Orange Foam / White Loop	5-1/4"	051111-51076-6	
		Orange Foam / Black Loop	5-1/4"	051111-60528-8	
		Red Foam	3-1/4"	051141-28874-1	
		Red Foam	3-3/4"	051141-28875-8	
		Red Foam	5-1/4"	051141-28876-5	
		Red Foam, Flat Face	3-1/2"	051141-28877-2	
		Green Foam	3-1/4"	051141-28869-7	
		Green Foam	3-3/4"	051141-28870-3	
		Green Foam	5-1/4"	051141-28871-0	
		Green Foam, Flat Face	3-1/2"	051141-28872-7	
		White Foam / Black Loop	3"	051111-60799-2	
		Open Cell White Foam / White Loop	3-3/4"	051141-20271-6	
		White Foam / Black Loop	5-1/4"	051135-92500-3	
Open Cell White Foam	5-1/4"	051141-28401-9			
3M™ Hookit™ Clean Sanding Low Profile Disc Pad	Backup Pad for 3M™ Finesse-it™ Foam Buffing Pad	3" diameter	051141-20350-8		
3M™ Hookit™ Clean Sanding Low Profile Finishing Disc Pad	With Vacuum Grooves	5" diameter- with vacuum grooves	051111-51042-1		
Polishing Compounds	3M™ Finesse-it™ Polish - Extra Fine	EF (Extra Fine)	1gallon	051131-06002-9	
	3M™ Finesse-it™ Final Finish	FF (Final Finish)	1 liter	051144-82877-7	
			1gallon	051144-82878-4	
	3M™ Finesse-it™ Polish - Purple	P (Purple)	1gallon	051111-51157-2	
	3M™ Finesse-it™ Finishing Material	FM (Finishing Material)	1 liter	051144-81235-6	
			1gallon	051144-13084-9	
3M™ Finesse-it™ Polish - K215GP	Fine Finish	1gallon	051141-28881-9		
3M™ Finesse-it™ Polish - K211	High Viscosity Polish	1gallon	051141-28695-2		
Tools and Accessories	3M™ Buffer PN28333	Buffer	3" Diameter	051141-28333-3	
	3M™ Palm Buffer PN28769	Buffer	3" Diameter	051141-28769-0	
	3M™ Buffer PN28631	Buffer (Rotary)	3" Diameter	051141-28631-0	
	3M™ Buffer PN28392	Buffer	5" Diameter	051141-28392-0	
	Scotch-Brite™ High Performance Cleaning Cloth	N/A	N/A	048011-26224-1	



Sanding tips & techniques

- Start and stop tool on the work surface.
- Use water as a lubricant during sanding.
- Spray the abrasive disc with water before use.
- Make sure the backup pad is dry when replacing the disc.
- Sand in a small circular motion with the pad flat against the surface.

Polishing tips & techniques

- Start the tool on the work surface.
- Do not “free spin” the tool.
- The buffer air line pressure needs to be set at 80 to 90 psi while the tool is running.
- Stop the tool before removing it from the work surface.

Call your 3M Sales Representative at 1-866-279-1235 or 3M Technical Service Representative today!

Warranty, Limited Remedy, and Disclaimer: Many factors beyond 3M’s control and uniquely within user’s knowledge and control can affect the use and performance of a 3M product in a particular application. User is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user’s method of application. Unless an additional warranty is specifically stated on the applicable 3M product packaging or product literature, 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If the 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M’s option, replacement of the 3M product or refund of the purchase price.

Limitation of Liability: Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.



Abrasive Systems Division
3M Center, Building 223-6S-03
St. Paul, MN 55144-1000
1-866-279-1235
www.3M.com/abrasives

Please recycle. Printed in USA.
© 3M 2016. All rights reserved.
Issued: 8/16 11548HB
61-5002-8419-7

3M, Finesse-it, Hookit, Roloc, Trizact, and Scotch-Brite are trademarks of 3M Company. Used under license by 3M subsidiaries and affiliates.