



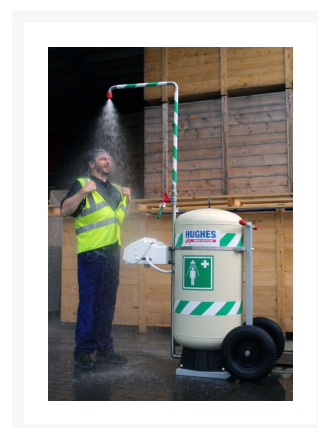

30 Gallon, Portable Hughes Self-Contained Safety Shower with Eye/Face Wash, Mobile - 40K45G

Product Images



Short Description

HUGHES



Justrite Safety Group

- Mobile eye/face wash and shower provides a continuous flow of water for 1-1/2 minutes
- High-performance quarter-turn ball valves made of 316L stainless steel endure the harshest environments and site conditions
- Covered, durable acrylic-capped ABS eye/face wash protects the bowl and eyewash diffusers from dust and debris
- Twin diffusers provide a gentle flow of aerated water and prevent further injury to the eyes

Description

This highly mobile, self-contained safety shower with eye/face wash holds 30-gallons (114-liter) of water for use in responding to potential accidents anywhere. Suitable for temporary use, this exclusive design features a corrosion-resistant, polypropylene-lined pressurized cylinder and only requires the connection of a hose from a water main to fill it ready for use.

Easily maneuvered by one person, it incorporates a stainless steel frame and large diameter pneumatic tires—adjustable wheel spacing allows the unit to go through standard door openings. Disconnect shower arm for compact transportation.

The eye/face wash with high, ANSI-compliant flow rate features an integral lid connected to the water valve for automatic operation—activate by simply pulling down the lid. Easy-to-reach flow regulator valve positioned on the side of the bowl adjusts to suit the severity of the accident. Suitable for Class 1 Division 2 hazardous areas, as well as non-hazardous areas.

Specifications

Model No	40K45G
Color	white
UPC	805042001738
Capacity	30 gallon
Net Weight, lbs	176
Net Weight, kg	80
Dimensions, Exterior	91" H x 29" W x 57.5" D 2315mm H x 734mm W x 1462mm D
Water Inlet Size NPT	1/2 in quick release hose connector
Minimum Operating Pressure	3 bar g, 43 PSI
Maximum Operating Pressure	5.5 bar g, 79 PSI
Water Flow Shower/Body Liters/min	75.7
Water Flow Shower/Body US Gal/min	20
Water Flow Eye/Face Liters/min	12
Water Flow Eye/Face US Gal/min	3
Operating Valve Material	Stainless steel, full bore, stay open ball valve
Eye/Face Wash Bowl Material	Acrylic-Capped ABS Plastic
Mounting Type	Portable
Pipework Material	Stainless Steel
Activation Method	Shower: Push down lever, Eye/Face: Pull lid down
Minimum Ambient Temperature, °F	41
Minimum Ambient Temperature, °C	5
Maximum Ambient Temperature, °F	95
Maximum Ambient Temperature, °C	35
Operation Duration, min	1.5