


# Static Shielding Bag 1300 Series


This transparent metal-in static shielding bag is designed to provide a static safe environment for ESD sensitive electronic devices. A stronger polyester layer helps prevent punctures. Bags are printed with an ESD protective symbol and a lot code for traceability. The bags are heat sealable. ZipTop and other custom features are available.

SCS Static Shielding Bags 1300 are manufactured from a polyester, metal, polyethylene laminate. The polyester dielectric in concert with the metal layer provides shielding of Electrostatic Discharge (ESD) and minimizes the penetration of electrostatic and electric fields.

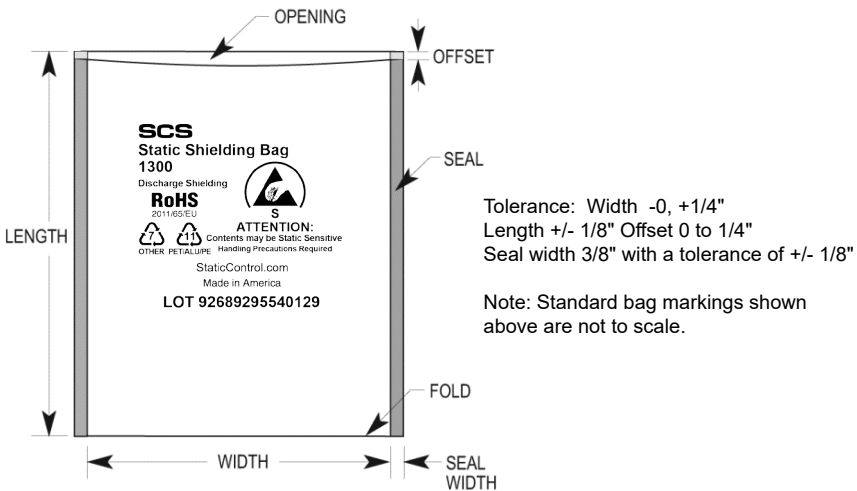

Tolerance: Width -0, +1/4"  
Length +/- 1/8" Offset 0 to 1/4"  
Seal width 3/8" with a tolerance of +/- 1/8"

Note: Standard bag markings shown above are not to scale.

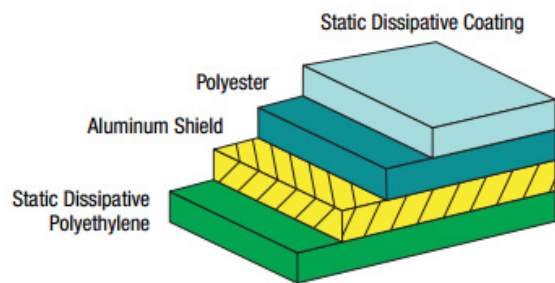

Meets ANSI/ESD S20.20 Packaging Standard, ANSI/ESD S541, and Static Control Bag ANSI/ESD S11.4 Level 3



Physical	Typical Value	Testing Method
Tensile Strength	8100 PSI, 55 MPa	ASTM D882
Puncture Resistance	22 lbs, 98 N	MIL-STD-3010C Method 2065
Seal Strength	15 lbs, 66 N	ASTM D882
Thickness	3.2 mils, 0.0813 mm +/-10%	MIL-STD-3010C Method 1003
Marking Adhesion	Pass	IPC-TM-650 2.4.1
Transparency	40%	Tobias

Electrical	Typical Value	Testing Method
Discharge Shielding	<20 nJ	ANSI/ESD STM11.31
Surface Resistance - Interior	1 x 10 <sup>4</sup> to < 1 x 10 <sup>11</sup> ohms	ANSI/ESD STM11.11
Surface Resistance - Exterior	1 x 10 <sup>4</sup> to < 1 x 10 <sup>11</sup> ohms	ANSI/ESD STM11.11

Cleanliness	Typical Value	Testing Method
Silicone	Not Detected	FTIR

Heat Sealing Conditions	Typical Value
Temperature	375°F, 190°C
Time	0.5 – 3.5 seconds
Pressure	30 – 70 PSI, 206 - 482 KPa

Bag is free of amines, silicones and heavy metals.

This product is intended for commercial use only. This product is not on the Qualified Product Listing under the Defense Standardization Program.

### RoHS 2, REACH, and Conflict Minerals Statement

None of the RoHS 2 restricted materials or REACH substances of very high concern as of 2017/01/12, or Conflict Minerals are intentionally added in manufacturing this product. Ref: European Union Directive 2011/65/EU and Regulation (EC) No. 1907/2006/CE. See [SCS Warranty, Limitation of Liability and Remedies](#)

Made in the United States of America with Globally Sourced Materials.

Specifications and procedures subject to change without notice.

### 1300 SERIES STATIC SHIELDING BAG

926 JR Industrial Drive, Sanford, NC 27332  
WEB SITE: [StaticControl.com](http://StaticControl.com)  
PHONE (919) 718-0000

**DRAWING NUMBER**  
1300 Series

**DATE**  
April 2017

